


# Lane Separator – Extension

Lane Separators · 1500 × 495 mm

The Extension unit runs between curved units to lengthen a separator island without additional lead-in profiles, forming continuous runs on long segregated sections. It shares the same 1500 × 495 × 130 mm footprint as the curved units; spacing between units allows surface water to pass.

## SPECIFICATION

|                        |                                                      |
|------------------------|------------------------------------------------------|
| <b>Product code</b>    | LS Extension                                         |
| <b>Plan dimensions</b> | 1500 × 495 mm                                        |
| <b>Height</b>          | 130 mm                                               |
| <b>Weight</b>          | 95–105 kg                                            |
| <b>Supplied as</b>     | One piece                                            |
| <b>Installation</b>    | Surface-mounted, rapid                               |
| <b>Material</b>        | 100% recycled tyre crumb rubber (solid, pre-moulded) |
| <b>Unit size</b>       | 1500 × 495 × 130 mm                                  |
| <b>Fixing</b>          | Surface-mounted — structural adhesive + bolts        |
| <b>Drainage</b>        | Unit spacing allows surface water to pass            |
| <b>Tolerance</b>       | ±1.5%                                                |

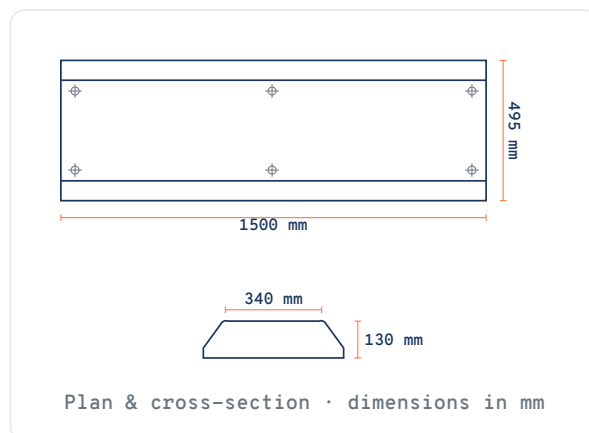

## OPTIONS & ACCESSORIES

- Heritage block pave effect surface (to order)
- Retroreflective glass eyes
- Compatible keep-left signs and bollards

Combines with Double Curve and Single Curve units

### Rapid installation

Surface-mounted, rapid — surface-mounted with no excavation or wet trades.

### Solid recycled rubber

Pre-moulded from 100% recycled tyre rubber; flexes to harsh cambers.

### Fit and forget

Fixing kit supplied. Compatible with standard signage and street furniture.