


Pedestrian Refuge Island

Pedestrian Refuges · 1200 × 1200 mm per island unit

The RI-1200 pedestrian refuge combines two DI-1200 one-piece island units with a 2000 mm surface-mounted tactile paving crossing area (15 no. 400 × 400 mm tiles), 4400 mm long overall. The complete refuge installs in half a day with no excavation, and accepts an optional cable-less solar-powered beacon.

SPECIFICATION

Product code	RI-1200
Plan dimensions	1200 × 1200 mm per island unit
Refuge assembly	1200 × 4400 mm overall
Height	125 mm
Weight	180 kg per island unit
Supplied as	2 island units + tactile paving
Installation	Half a day, complete refuge
Material	100% recycled tyre crumb rubber (solid, pre-moulded)
Fixing	Surface-mounted, fixing kit supplied — no excavation
Tactile paving	400 × 400 mm surface-mounted tiles, adhesive-fixed
Beacon	Optional cable-less solar-powered beacon with refuge post
Tolerance	±1.5%

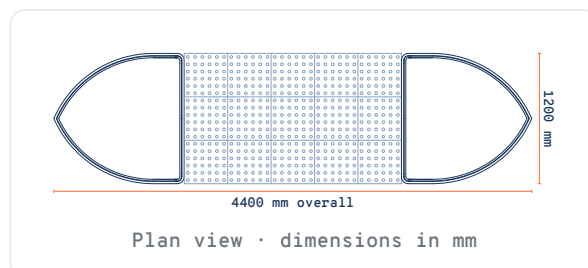

OPTIONS & ACCESSORIES

- Solar-powered refuge beacon (cable-less)
- Tactile paving tiles 400 × 400 mm (buff; red available)
- Tactile adhesive (1 pack covers 10 tiles)
- Heritage block paver surface (selected sizes)
- Extension pieces for bespoke geometry

Island unit: DI-1200

Rapid installation

Half a day, complete refuge — surface-mounted with no excavation or wet trades.

Solid recycled rubber

Pre-moulded from 100% recycled tyre rubber; flexes to harsh cambers.

Fit and forget

Fixing kit supplied. Compatible with standard signage and street furniture.