


Pedestrian Refuge Island

Pedestrian Refuges · 1500 × 1500 mm per island unit

The RI-1500 pedestrian refuge combines two DI-1500 two-piece island units with a 2000 mm tactile paving crossing area (20 no. 400 × 400 mm tiles), 5000 mm long overall. The complete refuge installs in half a day with no excavation, and accepts an optional cable-less solar-powered beacon.

SPECIFICATION

Product code	RI-1500
Plan dimensions	1500 × 1500 mm per island unit
Refuge assembly	1500 × 5000 mm overall
Height	125 mm
Weight	150 kg per island half
Supplied as	4 island pieces + tactile paving
Installation	Half a day, complete refuge
Material	100% recycled tyre crumb rubber (solid, pre-moulded)
Fixing	Surface-mounted, fixing kit supplied — no excavation
Tactile paving	400 × 400 mm surface-mounted tiles, adhesive-fixed
Beacon	Optional cable-less solar-powered beacon with refuge post
Tolerance	±1.5%

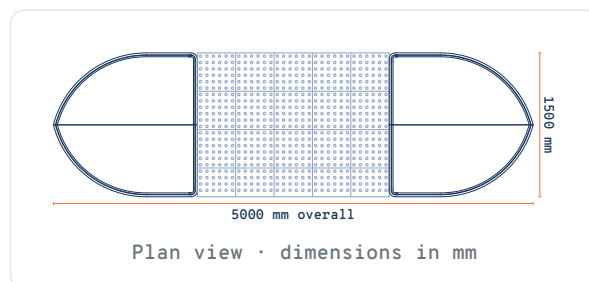

OPTIONS & ACCESSORIES

- Solar-powered refuge beacon (cable-less)
- Tactile paving tiles 400 × 400 mm (buff; red available)
- Tactile adhesive (1 pack covers 10 tiles)
- Heritage block paver surface (selected sizes)
- Extension pieces for bespoke geometry

Island unit: DI-1500

Rapid installation

Half a day, complete refuge — surface-mounted with no excavation or wet trades.

Solid recycled rubber

Pre-moulded from 100% recycled tyre rubber; flexes to harsh cambers.

Fit and forget

Fixing kit supplied. Compatible with standard signage and street furniture.