


Modular Refuge with Tactile Centre

Pedestrian Refuges · 1000 × 2000 mm per island unit

The RI-2000S modular refuge places two semicircular DI-2000 S island units either side of a full-width 2000 mm tactile crossing centre, forming a compact 4000 × 2000 mm refuge. Installs in half a day with no excavation; optional solar beacon.

SPECIFICATION

Product code	RI-2000S
Plan dimensions	1000 × 2000 mm per island unit
Refuge assembly	2000 × 4000 mm overall
Height	125 mm
Weight	230 kg per island unit
Supplied as	2 island units + tactile paving
Installation	Half a day, complete refuge
Material	100% recycled tyre crumb rubber (solid, pre-moulded)
Fixing	Surface-mounted, fixing kit supplied — no excavation
Tactile paving	400 × 400 mm surface-mounted tiles, adhesive-fixed
Beacon	Optional cable-less solar-powered beacon with refuge post
Tolerance	±1.5%

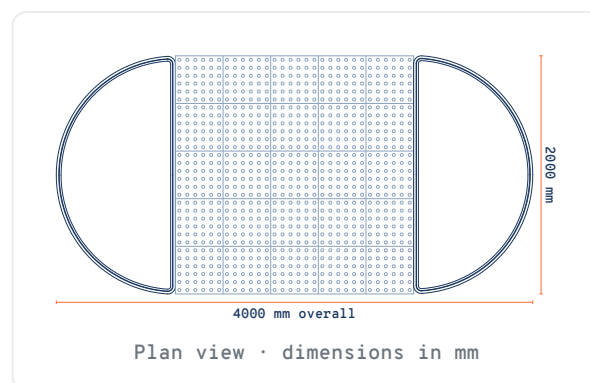

OPTIONS & ACCESSORIES

- Solar-powered refuge beacon (cable-less)
- Tactile paving tiles 400 × 400 mm (buff; red available)
- Tactile adhesive (1 pack covers 10 tiles)
- Heritage block paver surface (selected sizes)
- Extension pieces for bespoke geometry

Island unit: DI-2000 S

Rapid installation

Half a day, complete refuge — surface-mounted with no excavation or wet trades.

Solid recycled rubber

Pre-moulded from 100% recycled tyre rubber; flexes to harsh cambers.

Fit and forget

Fixing kit supplied. Compatible with standard signage and street furniture.

Spring Bank Mills, Sowerby Bridge HX6 3BW, United Kingdom · +44 (0)1422 839 456 · highways@rosehill.group

[rosehillhighways.com](https://www.rosehillhighways.com)