

Speed Cushions

Surface-mounted rubber speed cushions

Speed cushions are raised traffic-calming pads, narrower than a full-width road hump, that slow cars to around 20 mph while letting buses, fire engines and ambulances straddle them with little or no deflection. Rosehill manufactures the only one-piece rubber speed cushion made in the UK. All cushions are surface-fixed with no excavation — one-piece cushions install in under 30 minutes — and a free Rosehill Roadfix installation kit is included with every order.

KEY BENEFITS

- One-piece cushions installed in under 30 minutes
- Surface-fixed with adhesive and bolts — no excavation
- Buses and emergency vehicles straddle with little deflection
- Removable before resurfacing and reinstallable afterwards
- Conforms to DfT and UK council specifications
- Free Roadfix installation kit with every order

APPLICATIONS

20 mph streets, school approaches, bus routes, residential traffic calming and car parks where fast installation and low disruption matter.

COMMON SPECIFICATION

MATERIAL

100% recycled tyre crumb rubber (solid, pre-moulded)

HEIGHTS

65 mm or 75 mm

COLOURS

Black or red (other colours to order)

FIXING

Surface-fixed, free Roadfix installation kit included

COMPLIANCE

DfT and UK council specifications for road humps

TOLERANCE

±1.5%

One-piece cushions

Installed in under 30 minutes

CODE	PLAN SIZE	HEIGHT	WEIGHT	PIECES	INSTALLATION
SC-1650-2000	1650 × 2000 mm	65 or 75 mm	170 kg (65 mm) / 180 kg (75 mm)	1	Under 30 minutes


Two-piece cushions

Longer 3 m cushions supplied in two halves


CODE	PLAN SIZE	HEIGHT	WEIGHT	PIECES	INSTALLATION
SC-1650-3000	1650 × 3000 mm	75 mm	130 kg per half	2	Under 40 minutes
SC-1750-3000	1750 × 3000 mm	65 mm	140 kg per half	2	Under 40 minutes
SC-1900-3000	1900 × 3000 mm	75 mm	150 kg per half	2	Under 40 minutes

OPTIONS & ACCESSORIES


- Directional arrow markings
- Moulded logos and speed indicators
- Reflective emblem or logo
- M16 lifting holes for handling

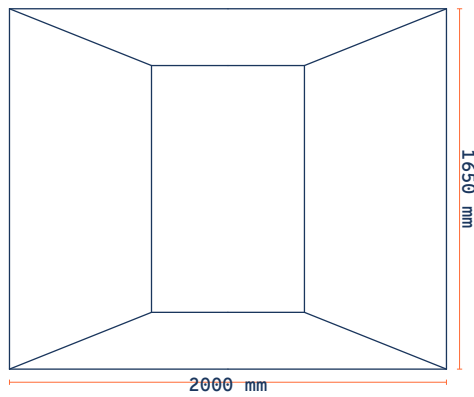


SC-1650-2000
1650 × 2000 mm

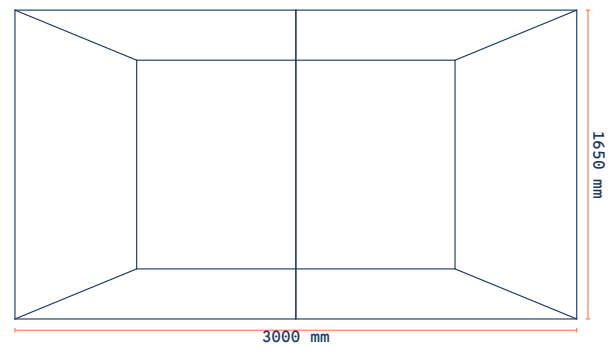

SC-1650-3000
1650 × 3000 mm

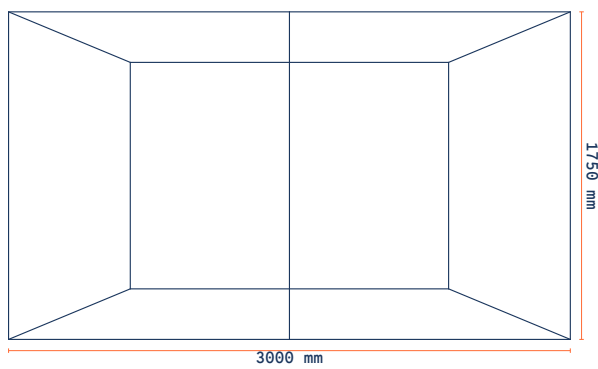

SC-1750-3000
1750 × 3000 mm

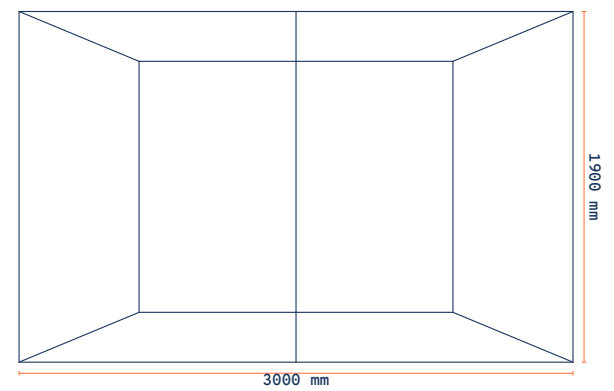

SC-1900-3000
1900 × 3000 mm